# °CJ-46: Wide Dispersion Horn/Flare Assembly

Extensively used in stadiums and outdoor events, the CJ46 offers maximum sound penetration in adverse sound conditions.

Units can be mounted individually or grouped / clustered and securely fixed using the heavy duty bracket. Standard 1%" / 35mm thread allows the fitting of most industry-standard compression drivers (HD-35 / HD-50 recommended).

#### Features:

- Robust glass fibre / metal construction
- Environment resistant for both indoor and outdoor use
- Fully serviceable components
- Operational temperature range of -35°  $\sim$  +66°C
- Multi-position mounting bracket



# •HD35 / HD50: 35W & 50W Compression Driver Assemblies

Supplied with industry standard 1%" / 35mm threads, the HD35 and HD50 are compatible with most flares and horns on the market.

Manufactured from cast aluminum and ABS, the units are robust and weatherproof. Multi-tappings 100v transformers and field replaceable voice coils complete the package.


#### Features:

- Robust ABS construction
- 100v power tapping options
- Field replaceable voice coils (HDVC35 / HDVC50)



## Specifications:

Model:	CJ-46:	
Colour	Black	
Dispersion	120° x 60°	
Dimensions	558(W) x 305(H) x 432(D) mm	
Weight	6.58kg	

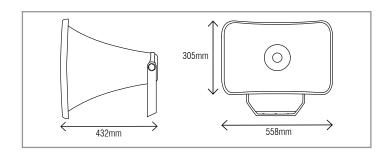



## Specifications:

Model:	HD35:	HD50:
100v Power Tappings	10, 15, 20, 35W	15, 30, 50W
Frequency Response	510Hz ~ 3.27kHz	319Hz ~ 2.96kHz
SPL@1w/1m	113dB	111.5dB
Colour	Grey RAL9007	Grey RAL9007
Material	Aluminium / ABS	Aluminium / ABS
Dimensions	108(Ø) x 152(D) mm	138(Ø) x 148(D) mm
Weight	2.5kg	2.9kg

